

MASONS

Air-Flex

MASONS Air-Flex is a plasticizer that has been manufactured especially for use by brick and blocklayers. The scientific formulation of MASONS Air-Flex provides the tradesman with a safe, low dosage, and extremely economical mortar plasticizer.

USES:

When using MASONS Air-Flex as a mortar additive no additional admixtures are required. The product performs well regardless of the cement and sand types used.

ADVANTAGES:

- All types of sand
- Excellent workability
- Longer board life
- User friendly
- Non-toxic
- Cost effective
- Low dosage
- Sturdy plastic container
- Provides good bond strength

APPLICATION:

Manual hand mixing: Thoroughly shake container prior to use.


- Dry mix the required sand/cement in a wheel barrow
- Add MASONS Air-Flex approx. 10-15gm per 20kgs of cement
- Dry mix thoroughly.
- Add water to desired consistency and mix.

Note: Dosage may vary depending on condition of the sand

Mechanical mixing: Thoroughly shake container prior to use.

- Add two thirds of the required water to the mixer.
- Add 10 – 20gms (1-2 scoops) of MASONS Air-Flex
- Add half the required sand and allow to mix.
- Add all the cement and the balance of the sand.
- Add the balance of the water to obtain the correct consistency.

DRY OR WET MIX

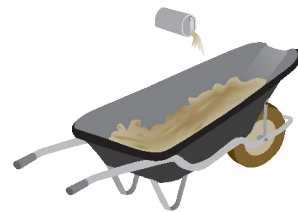

MIXING WATER



YIELD:


MASONS Air-Flex is used at the rate of 30grams per 40kg bag of Cement. More or less can be used to suit but do not overdose. Usage is dependant on the sand or cement type and condition. If in doubt contact the manufacturer. Each container of MASONS Air-Flex will plasticize the following amount of bags of cement (40kg).



MASONS

| 12c Te Kea Place, Albany

| Freephone 0800 522 533

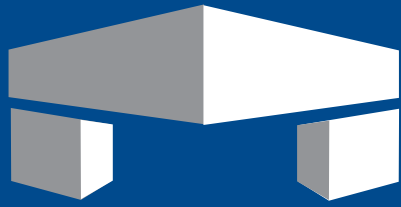

MASONS

Air-Flex

HEALTH & SAFETY:

- Keep out of reach of children
- May cause skin irritation with repeat contact.
- MASONS Air-Flex is non-toxic, however it should not be swallowed or splashed into eyes. Seek medical advice if this occurs.

PACKAGING:

Container Size	No of 40 Kg bags of cement
0.7 Kg	23
1.7 Kg	56
4.0 Kg	133
10.0 Kg	333
15.0 Kg	500

TECHNICAL SERVICE:

For your nearest stockist or additional technical information on MASONS products and our wide range of sealing compounds, concrete admixtures and additives for the construction industry, contact MASONS on 0800 522 533.

The above information is based on our best knowledge and presented in good faith and we believe it to be true and accurate, however, due to the variable nature of application the suitability of the product for the intended use is the sole responsibility of the user.

For a comprehensive list of products check out our website:

WWW.MASONS.ORG.NZ



MASONS

| 12c Te Kea Place, Albany

| Freephone 0800 522 533